


Berridge Deep-Deck Panel

EXPOSED FASTENER PANEL SYSTEM



The Berridge Deep-Deck Panel is a prefinished corrugated panel with a 7.2" rib spacing. This economical 36" wide panel, with structural properties, can be installed with exposed fasteners horizontally or vertically over open framing or solid sheathing. Deep-Deck is available in two substrate choices and is ideal for a variety of applications.

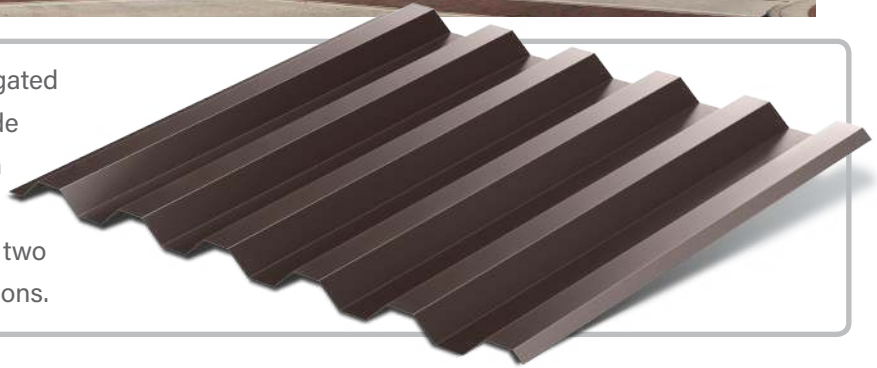

Materials

24 and 22 Gauge Steel
0.032 and 0.040 Aluminum

Specifications

Uses: Roof, Wall, Soffit, Ceiling, Fascia, Sheathing, Screen Wall

Coverage: 36"


Finishes: Smooth corrugated

Fasteners: Exposed

Applications: Vertical on Roof; vertical or horizontal over open framing or solid sheathing for other uses

Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- Structural properties allow it to be utilized as a sheathing option
- Deep deck rubber closures to help prevent air infiltration at ridges, eaves, head walls, etc.
- Use expandable foam filler tape per installation details as closure at hips and valleys
- Use mastic sealant tape per installation details at panel endlap, sidelaps, skylights, with foam closures, etc.
- Estimate 120 fasteners/sq

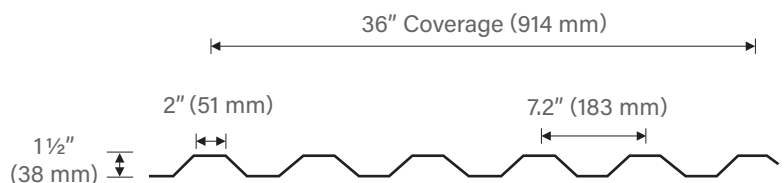

Pictured Above
Project: NOBAY Village
Architect: WMB-ROI Architecture
General Contractor: RODDA Construction, Inc.
Installing Contractor: CA Systems
Color: Acrylic-Coated Galvalume®

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2018 • 800-669-0009 • www.berridge.com

BERRIDGE DEEP-DECK PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	<input type="checkbox"/> Uplift Resistance	ASTM E-1592	Test method to determine uplift resistance of open framing systems	See Load Chart on Berridge website
FIRE	<input checked="" type="checkbox"/> Room Fire Performance	UL 790	Test methods for fire tests of roof coverings	Class A Rating
ENVIRONMENTAL	<input checked="" type="checkbox"/> Impact Resistance	UL 2218	Impact resistance of prepared roof coverings	Class 4 Rating
AIR AND MOISTURE	<input type="checkbox"/> Water Penetration	ASTM E-1646	Test method for water penetration of metal roofs by uniform static air pressure difference	No Leakage at 6.24 PSF Pressure Differential
	<input type="checkbox"/> Air Leakage	ASTM E-1680	Test method for rate of air leakage through exterior metal roofs	Less than 0.01 CFM at 6.24 PSF Pressure Differential
ROOF LISTINGS	<input type="checkbox"/> Florida Product Approval	TAS 125	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL# 14210.5 (24 or 22 GA-Purlins/Girts) FL# 18522.1 (0.032 AL-Purlins)
	<input checked="" type="checkbox"/> Underwriters Laboratories	UL 580 Uplift Class 90	Standard for Tests for Uplift Resistance of Roof Assemblies	Construction No. 244 (Open Framing)
	<input type="checkbox"/> TDI Listed	ASTM E-1592	Texas Department of Insurance Listing for wind capacities	RC-558 (24 or 22 GA-Purlins) RC-557 (0.032 AL-Purlins)

- Steel only - Steel and Aluminum
 For further details please visit www.berridge.com



CORPORATE HEADQUARTERS
 2610 Harry Wurzbach Road
 San Antonio, TX 78209
 (800) 669-0009
www.Berridge.com