




# CABLE TRAY SUPPORT SYSTEM

SPECIFICATION & TECHNICAL INFORMATION SHEET

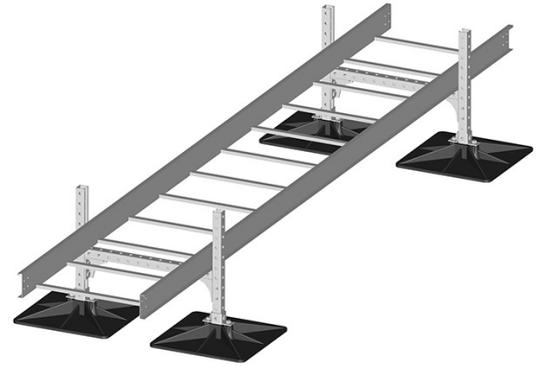

## DESCRIPTION:

The Cable Tray is designed to support electrical cable runs, at any specified height or width. The support is designed for installation without roof penetrations, flashings or damage to the roofing material. The support can be used for virtually any roofing system from flat roofs to roofs sloped up to 2in 12. The supports should be spaced according to the specifications. Seismic and High-Wind applications are available for the system.

## INSTALLATION PROCEDURE:

- 1** | Layout isolation pads, (provided by contractor), according to the design and layout.
- 2** | Place bases on isolation pads.
- 3** | Insert the legs of cable tray frame support with 2-1/2" bolt and 1/2" nut).
- 4** | Space out cable tray support according to specifications. This should be done before any weight is supported.
- 5** | **IF BRACING IS REQUIRED**, attach horizontal bracing to legs of pipe supports, (approximately 3/4 of the way up the height of the support), with 3" bolts and 1/2" nut.  
NOTE: If double or triple bracing is required, designated locations will be marked on support legs.
- 6** | Adjust width up to bottom of frame.
- 7** | Make sure cable tray supports are level, vertically and horizontally, and proper spacing is maintained per design specifications.
- 8** | Check that the weight of the cable is distributed evenly throughout the system.

## STORAGE:

Store in the original, unopened containers, under cover, until needed for installation.

## LEED INFORMATION:

Frame/Steel  
Post Consumer Recycled Content: 0%  
Post Industrial Recycled Content: 25%

## BASE MATERIAL:

Post Consumer Recycled Content: 80%  
Post Industrial Recycled Content: 20%  
Manufacturing Location: Houston, TX

## PRODUCT DATA:

### Property:

#### Base:

Size:	12" x 12" x 3", or 18" x 18" x 3" or 18" round
Base Weight:	7 lbs and 10-1/2 lbs
Base Material:	Injection molded high density/high impact polypropylene with UV-inhibitors and Antioxidants
Base Color:	Black
Base Density:	55.8 lb/cu ft (894 kg/cu m)

### Minimum Performance:

## Carbon Steel and 304 Stainless Steel Framing:

Channel Types:	1-5/8" (41.3 mm) or 1-7/8" (47.6 mm) as required by loading
Form:	Roll-formed 3-sided tubular shape, perforated with 9/16" (14.3 mm) holes at 1-7/8" (47.6 mm) centers on three sides
Thickness:	12 gauge (2.7 mm)
Carbon Steel Finish:	Hot dip galvanized per ASTM A 123
Stainless Steel Finish:	Mill Finish

## Hardware:

Nuts and Washers:	Hot Dip Galvanized or 304 Stainless Steel
-------------------	---