

VACUSEAL™ VENT SECURED ROOF SYSTEM

Cost-effective and easy to install


The fact that roofs need to offset wind forces is not a new concept. That's why Versico Roofing Systems is pleased to introduce the VacuSeal Vent Secured Roofing System. This revolutionary assembly uses special vents that harness the power of the wind to lock roof membranes in place. VacuSeal systems are quick and easy to install and save you money and labor by substantially reducing the amount of glue, ballast, or fasteners your project requires. This engineered system is designed to provide optimal performance while opening opportunities for retrofit and monolithic deck applications.

How it Works

It's all because of the Venturi Principle, in which a vacuum is created whenever the speed of the wind moves faster than air in surrounding areas. Each V2T Vent is designed to create that vacuum and leverage its suction to pull air out from under membranes and lock vents into place. Uplift pressures are negated by the greater vacuum force created by each vent.

Features and Benefits

- Reduces installation time and minimizes the need for traditional fastening methods
- Negative pressure venting pulls air and moisture out from under the membrane to maintain insulation dryness and R-value
- No cold weather limitations
- No VOC's or odors
- VacuSeal V2T Vents are made from UV-resistant PVC, containing no moving parts, require no penetrations, and provide effective performance regardless of wind direction
- UL Certified with uplift certification at 195 psf negative pressure

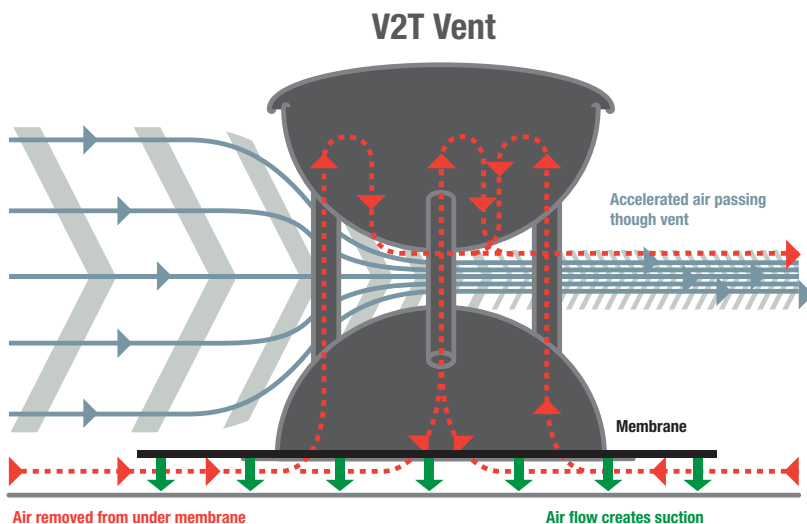

THE TESTS


NASA Wind Tunnel – The VacuSeal Vent Secured Roofing System was tested in a full-scale roof mock-up at the NASA Full Scale Tunnel at Langley Air Force Base. These wind tests confirmed that the V2T technology held the roof membrane in place with wind speeds approaching Category 1 hurricane-force winds.

Underwriters Laboratory (UL) – The VacuSeal Vent Secured Roofing System is UL Certified with uplift certification at 195 psf negative pressure. VacuSeal achieved the maximum level on UL's static chamber test equipment – 278 psf – without failure.




VACUSEAL VENT SECURED ROOF SYSTEM

Steel Deck*

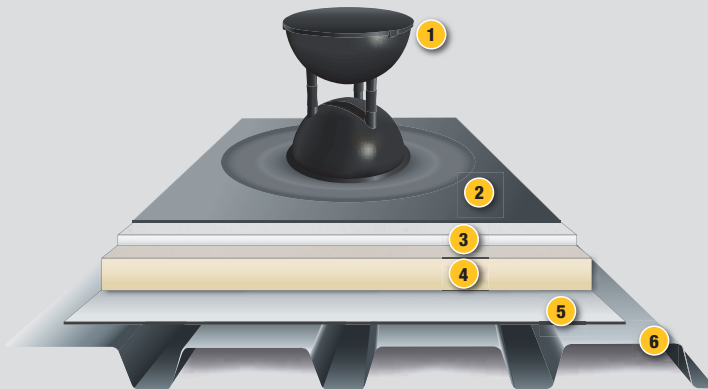

- 1 V2T Vent
- 2 Versico-Approved Membrane
- 3 0.5" Versico-Approved Cover Board
- 4 1.5" SecurShield® Polyiso Insulation
- 5 VapAir Seal™ MD
- 6 Versico-Approved Steel Deck

Concrete Deck*

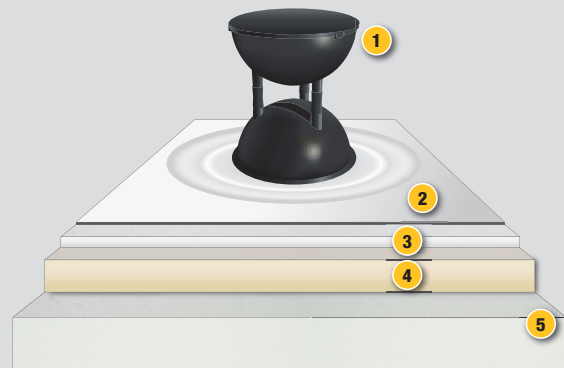

- 1 V2T Vent
- 2 Versico-Approved Membrane
- 3 0.5" Versico-Approved Cover Board
- 4 1.5" SecurShield® Polyiso Insulation
- 5 Lightweight Structural Concrete Deck

REVIEW CURRENT VERSICO SPECIFICATIONS AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

*New construction



VERSICO
ROOFING SYSTEMS

A SINGLE SOURCE FOR SINGLE-PLY ROOFING

Versico, PO Box 1289, Carlisle, PA 17013
Tel: **800.992.7663** Fax: 717.960.4036 Web: **www.versico.com**

Versico and the Versico logo are trademarks of Versico.
VacuSeal, SecurShield, and VapAir Seal are trademarks of Carlisle Construction Materials, LLC.