

Berridge Vee-Panel

WALL, SOFFIT, CEILING AND FASCIA PANEL SYSTEM



The Berridge Vee-Panel is a versatile and maintenance free panel. The prefinished wall panels can be used over open framing or solid sheathing. The panel can be used throughout a project in many different applications and is available in smooth or wood grain embossed finishes and a vented option.



Materials

24 and 22 Gauge Steel

Specifications

Uses: Wall, Soffit, Ceiling, Fascia, Screen Wall, Berridge Fencing System

Coverage: 12 3/4"

Finishes: Smooth, optional wood grain


Fasteners: Concealed

Applications: Vertical over open framing or solid sheathing

Pattern: 4 1/4" between grooves, optional venting

Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- Vented option provides 6.46 square inches of Net Free Vent Area (NFVA) per linear foot (6.08 in²/ft²) of panel. (BMC does not recommend vented products in applications subject to aggressive atmospheres, marine environments or high humidity due to the corrosive nature of these environments on raw edges of steel.)

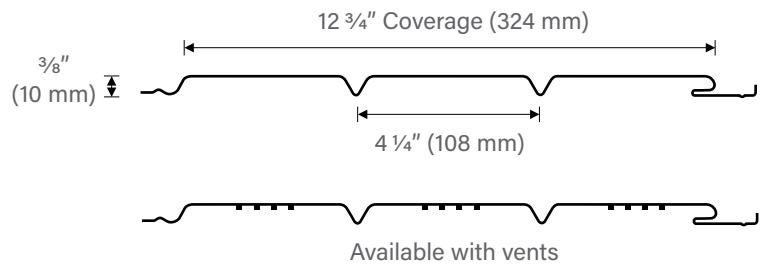

Pictured Above

Project: Jones 13 Living
Architect: Holland Basham Architects
General Contractor: Scott Enterprises, Inc.
Installing Contractor: Darland Corporation
Color: Zinc Grey

Pictured Right - Top

Vented Example

Pictured Right - Bottom

Project: 21st Montana
Architect: William Hefner
General Contractor: Pacific Cove Development
Installing Contractor: Barkley Sheet Metal
Color: Zinc-Cote™

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2018 • 800-669-0009 • www.berridge.com



CORPORATE HEADQUARTERS

2610 Harry Wurzbach Road

San Antonio, TX 78209

(800) 669-0009

www.Berridge.com