




STAIRS

SPECIFICATION & TECHNICAL INFORMATION SHEET

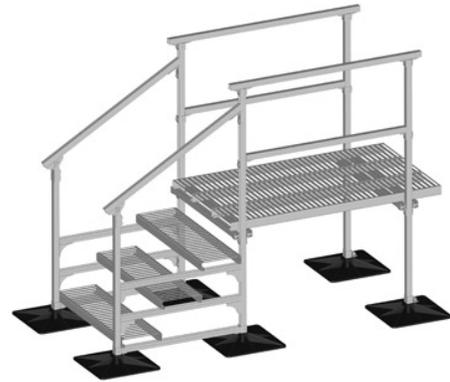

DESCRIPTION:

The PHP Stairs are designed to access different levels of roofs and equipment, that may be out of reach. It is specifically designed to be installed directly on the roof without penetrations, flashings or damage to the roofing material.

INSTALLATION PROCEDURE:

- 1** | Layout isolation pads according to footprint of stairs.
- 2** | Isolation pads:
 - a. Must be compatible with existing roof or new roof system being installed, (check with manufacturer).
 - b. Need not be adhered to roofing membrane.
- 3** | Place each set of stairs in bases according to diagram.
- 4** | Form stairs by placing planking between each set of substructures, attaching with hold-down clips.
- 5** | Set intermediate handrails on intermediate brackets and attach with 1" bolt and 1/2" spring nut.
- 6** | Set top handrail on top brackets and attach with 1" bolt and 1/2" spring nut.
- 7** | Tighten all nuts, bolts and hold-downs.

STORAGE:

Store in the original, unopened containers, under cover, until needed for installation.

LEED INFORMATION:

Frame/Steel
Post Consumer Recycled Content: 0%
Post Industrial Recycled Content: 25%

BASE MATERIAL:

Post Consumer Recycled Content: 80%
Post Industrial Recycled Content: 20%
Manufacturing Location: Houston, TX

PRODUCT DATA:

Property:

Base:
Base Material:

Minimum Performance:

Injection molded high density/high impact polypropylene with UV-inhibitors and Antioxidants

Base Color:
Base Density:

Black
55.8 lb/cu ft (894 kg/cu m)

Carbon Steel and 304 Stainless Steel Framing:

Channel Types: 1-5/8" (41.3 mm) or 1-7/8" (47.6 mm) as required by loading
Form: Roll-formed 3-sided tubular shape, perforated with 9/16" (14.3 mm) holes at 1-7/8" (47.6 mm) centers on three sides
Thickness: 12 gauge (2.7 mm)
Carbon Steel Finish: Hot dip galvanized per ASTM A 123
Stainless Steel Finish: Mill Finish

Surface:

Type: Walkway Planking 18-ga. steel
Section Width X Height: 12" x 2.5"
Flange Options: FM and MM
Surface Condition: MG-traction grip
Carbon Steel Finish: Hot dip galvanized per ASTM A 123
Type: Bar grating type WB-4, Carbon Steel
Section Width as required
Bar Grating Height: 1"
Surface Condition: Serrated
Carbon Steel Finish: Hot dip galvanized per ASTM A 123